

# Fedora 4.4 Documentation

- [Quick Start](#)
  - [Deployment Tooling](#)
- [Feature Tour](#)
  - [Feature Tour - Actions](#)
    - [Feature Tour - Action - Content](#)
    - [Feature Tour - Action - Create Resource](#)
    - [Feature Tour - Action - Delete](#)
    - [Feature Tour - Action - Import](#)
    - [Feature Tour - Action - Transactions](#)
    - [Feature Tour - Action - Update Properties](#)
  - [Feature Tour - Types](#)
- [Features](#)
  - [Authorization](#)
    - [Access Roles Module](#)
    - [Authorization Delegates](#)
      - [Basic Role-based Authorization Delegate](#)
      - [Design Guide - Authorization Delegates](#)
      - [WebAC Authorization Delegate](#)
      - [XACML Authorization Delegate](#)
        - [Fedora Basic Roles - ModeShape Permission](#)
        - [Fedora XACML Attributes](#)
        - [XACML Design Discussion](#)
    - [How To Bypass Authorization](#)
    - [How to Configure Servlet Container Authentication](#)
    - [Principal Providers](#)
    - [XACML Authorization Module](#)
  - [Backup and Restore](#)
  - [External Search](#)
    - [Indexable Node Type](#)
    - [Indexing Transformations](#)
    - [Solr Indexing Quick Guide](#)
  - [External Triplestore](#)
    - [Triplestore Setup](#)
    - [Indexer Configuration](#)
      - [ElasticIndexer](#)
      - [FileSerializer](#)
      - [JcrXmlPersistenceIndexer](#)
      - [RdfPersistenceIndexer](#)
      - [SolrIndexer](#)
      - [SparqlIndexer](#)
    - [SPARQL Recipes](#)
  - [Filesystem Federation](#)
    - [External Content](#)
    - [How to audit fixity in a filesystem federation](#)
    - [How to federate over a filesystem that is updated externally](#)
    - [How to incorporate static filesystem resources into your repository](#)
  - [RESTful HTTP API](#)
    - [RESTful HTTP API - Access Roles](#)
    - [RESTful HTTP API - Backup and Restore](#)
    - [RESTful HTTP API - Containers](#)
    - [RESTful HTTP API - Export and Import](#)
    - [RESTful HTTP API - Fixity](#)
    - [RESTful HTTP API - Node Types](#)
    - [RESTful HTTP API - Transactions](#)
    - [RESTful HTTP API - Transform](#)
    - [RESTful HTTP API - Versioning](#)
  - [Transactions](#)
  - [Versioning](#)
  - [Clustering](#)
  - [Identifiers](#)
  - [Linked Data Platform](#)
- [Administrator Guide](#)
  - [Deploying Fedora 4 Complete Guide](#)
    - [Application Configuration](#)
      - [Configuration Options Inventory](#)
      - [Configuring a JMS Event Filter](#)
      - [Configuring an External PID Minter](#)
      - [Configuring Logging With System Properties](#)
    - [Java HotSpot VM Options recommendations](#)
    - [System Requirements](#)
  - [Authentication and Authorization](#)
  - [Deploying a Fedora Cluster](#)
    - [Cluster Management Tips](#)
  - [Metrics Reporting](#)
    - [Setup a Graphite instance](#)

## Featured Pages

### Content by label

There is no content with the specified labels

## Recently Updated Pages

### [RESTful HTTP API - Containers](#)

Aug 17, 2016 • updated by [Andrew Woods](#) • [view change](#)

### [Deploying a Fedora Cluster](#)

Jan 19, 2016 • updated by [Andrew Woods](#) • [view change](#)

### [Fedora 4.4 Documentation](#)

Oct 14, 2015 • updated by [Andrew Woods](#) • [view change](#)

### [Technical Implementation Glossary](#)

Oct 14, 2015 • created by [Andrew Woods](#)

### [Glossary](#)

Oct 14, 2015 • created by [Andrew Woods](#)


## Popular Topics

- [f4-vx](#)
- [kb-how-to-article](#)
- [f4-core-feature](#)
- [f4-non-spec-feature](#)
- [f4-resources](#)
- [metadata-design-patterns](#)
- [featured](#)
- [authentication](#)
- [fedora](#)
- [metrics](#)

- Setup Camel Message Integrations
  - Integration Services
  - Writing Custom Camel Routes
- Setup OAI-PMH Provider
- ModeShape Artifacts Layout
- Performance
  - Performance Testing
    - AuthZ - No AuthZ Fedora 4 Comparison Performance Testing
    - Fedora3 - Fedora 4 Comparison Performance Testing - 10,000 objects
    - Fedora 4 Objects CRUD Performance Testing
    - Fedora 4 Properties CRUD Performance Testing
    - Flat Hierarchies Testing
    - Platform Profiles
      - Determining Hardware Properties
      - Platform Profile: Cluster at Universitatea de Vest din Timioara
      - Test - Platform Profile: Cluster at Karlsruhe Institute of Technology - SCC
      - Test - Platform Profile: Cluster at Stanford University
      - Test - Platform Profile: Cluster at UNC Chapel Hill
      - Test - Platform Profile: Cluster at University of Wisconsin
      - Test - Platform Profile: Cluster at Yale University
      - Test - Platform Profile: Cluster in Amazon Web Services
      - Test - Platform Profile: ksclarke EC2 m3.medium
      - Test - Platform Profile: lib-devsandbox1.ucsd.edu
        - Test Results Summary
      - Test - Platform Profile: melendor.local
      - Test - Platform Profile: saez workstation
      - Test - Platform Profile: Single VM at UNC Chapel Hill
    - Repository Profiles
      - Test - Repository Profile: Basic
      - Test - Repository Profile: Basic File LevelDB
      - Test - Repository Profile: Basic with authorization
      - Test - Repository Profile: Clustered with versioning and authorization
      - Test - Repository Profile: Federation
      - Test - Repository Profile: Minimal
        - Test - Platform Profile: Transaction Benchtool Config
    - Setup Profiles
      - Test - Setup Profile: 2,000 x 50MB
      - Test - Setup Profile: 10,000 x 1KB
      - Test - Setup Profile: 10,000 x 1MB
      - Test - Setup Profile: 10,000 x 50MB
      - Test - Setup Profile: 1000 x 1MB
      - Test - Setup Profile: Empty Repository
      - Test - Setup Profile: Image Collection
      - Test - Setup Profile: Trees
    - Single-Node Test Results
    - Versioning Performance
    - Workflow Profiles
      - Test - Workflow Profile: Benchtool Delete
      - Test - Workflow Profile: Benchtool Ingest
      - Test - Workflow Profile: Benchtool Property Create
      - Test - Workflow Profile: Benchtool Property Delete
      - Test - Workflow Profile: Benchtool Property Read
      - Test - Workflow Profile: Benchtool Property Update
      - Test - Workflow Profile: Benchtool Read
      - Test - Workflow Profile: Benchtool Update
      - Test - Workflow Profile: Delete
      - Test - Workflow Profile: Ingest
      - Test - Workflow Profile: Read
      - Test - Workflow Profile: Repository/Federation/NFS/SCP Comparison
      - Test - Workflow Profile: Update
      - Test - Workflow Profile: Upload/Download Roundtrip
  - Large File Ingest and Retrieval
  - Large Numbers of Containers
  - Response Time Comparison of Single Fedora VS Cluster
  - Stanford SALT Collection
- Setup Audit Service
  - Audit Events for External Processes
  - Event-Driven Audit Events
  - Internal Audit Events
- Developer Guide
  - Hydra and Fedora 4
  - Islandora and Fedora 4
  - Maven build system

- [FAQs and How-Tos](#)
    - [Concept Mapping - Fedora 3 to 4](#)
    - [How-To Articles](#)
      - [How to Create a new JAX-RS resource](#)
      - [How to Get Involved](#)
      - [How to inspect LevelDB](#)
      - [How to Model a Book](#)
      - [How to Run Fedora4 in AWS](#)
      - [How to setup a Fedora cluster](#)
    - [First Steps](#)
    - [Durability](#)
    - [Event-driven APIs](#)
    - [The Fedora 4 object model](#)
    - [Usage Best Practices](#)
    - [LDP-PCDM-F4 In Action](#)
      - [LDP-PCDM-F4 In Action - Book](#)
      - [LDP-PCDM-F4 In Action - Collection](#)
      - [LDP-PCDM-F4 In Action - Ordering](#)
  - [Glossary](#)
    - [Technical Implementation Glossary](#)
- 

## Component Stack

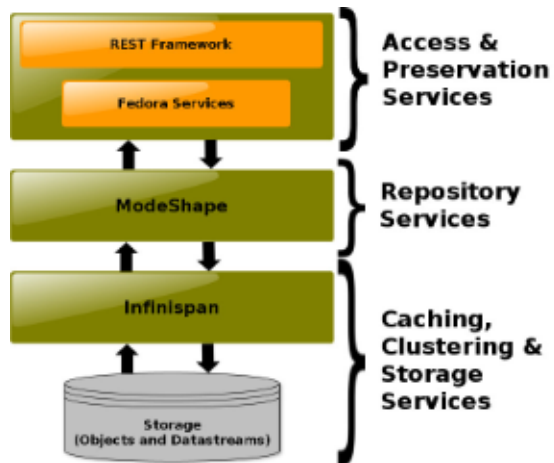

## Integration Architecture

